

WEL COME

TO B.S.N.L.(WEST ZONE) G.P.R.S. SERVICES

*CONNECTIVITY OF SAMSUNG SGH-U600 WITH LAPTOP OR PC
USING USB CABLE VIA GPRS FOR BROWSING INTERNET.*

Click on Install Samsung PC Studio




The procedure is same for all SAMSUNG handsets having PC Studio. Here I had taken example of SAMSUNG SGH-U600.


Please wait for some time.



Click on Next

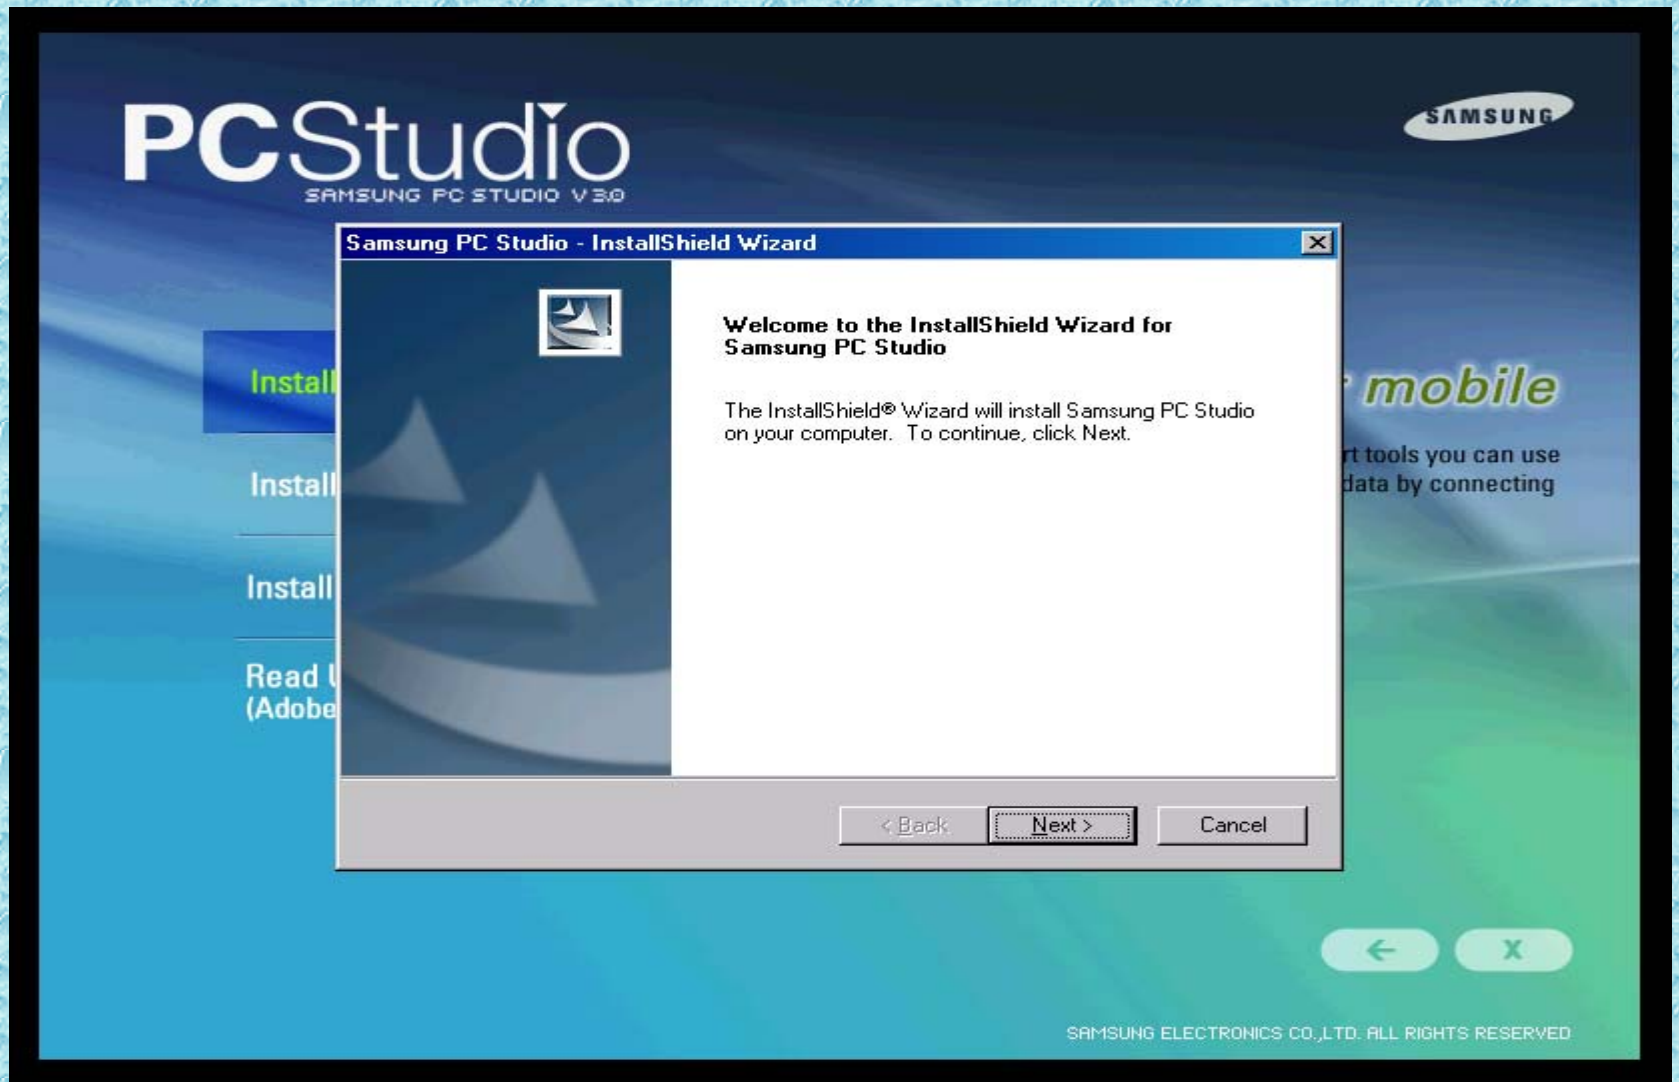

Select I accept the terms of the license agreement
and Click on Next

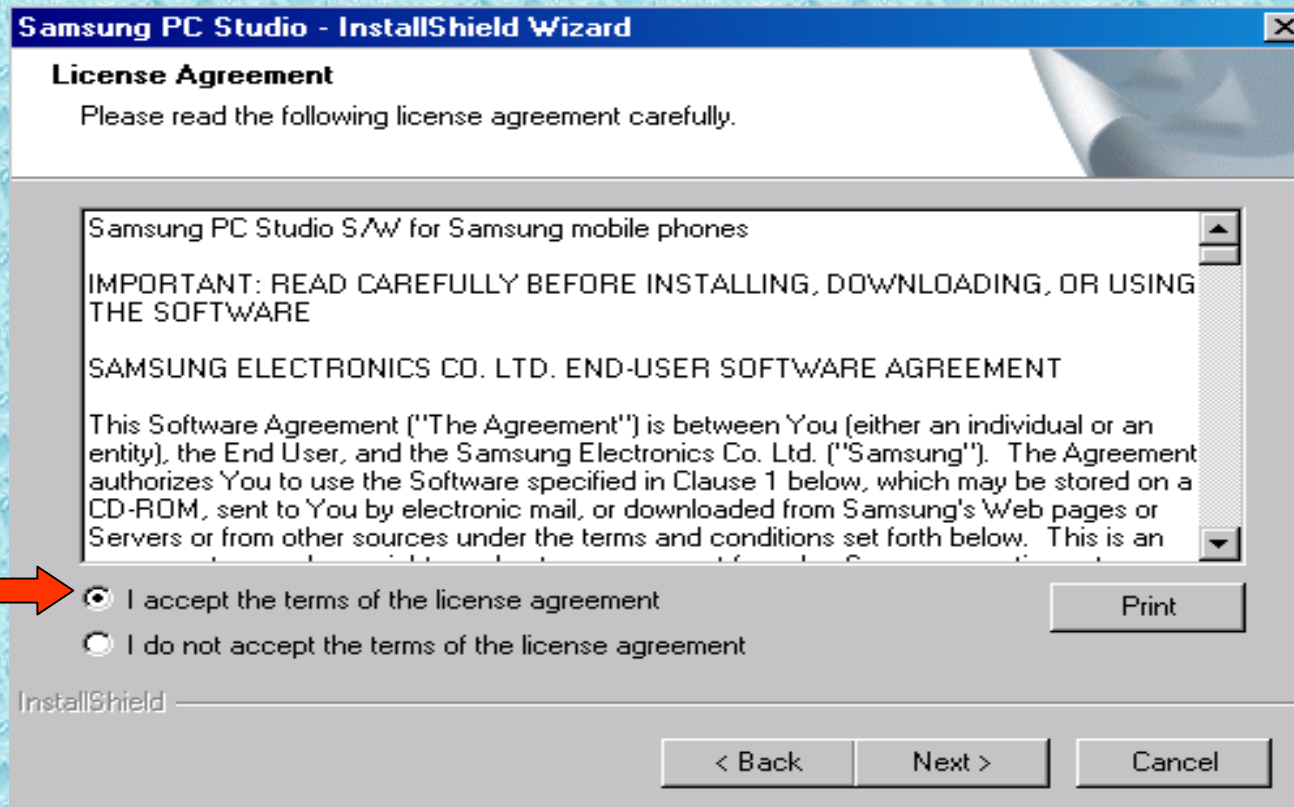

Samsung PC Studio - InstallShield Wizard

License Agreement

Please read the following license agreement carefully.

Samsung PC Studio S/W for Samsung mobile phones

IMPORTANT: READ CAREFULLY BEFORE INSTALLING, DOWNLOADING, OR USING THE SOFTWARE

SAMSUNG ELECTRONICS CO. LTD. END-USER SOFTWARE AGREEMENT

This Software Agreement ("The Agreement") is between You (either an individual or an entity), the End User, and the Samsung Electronics Co. Ltd. ("Samsung"). The Agreement authorizes You to use the Software specified in Clause 1 below, which may be stored on a CD-ROM, sent to You by electronic mail, or downloaded from Samsung's Web pages or Servers or from other sources under the terms and conditions set forth below. This is an

I accept the terms of the license agreement


I do not accept the terms of the license agreement

Print


InstallShield

< Back Next > Cancel


Click on Next

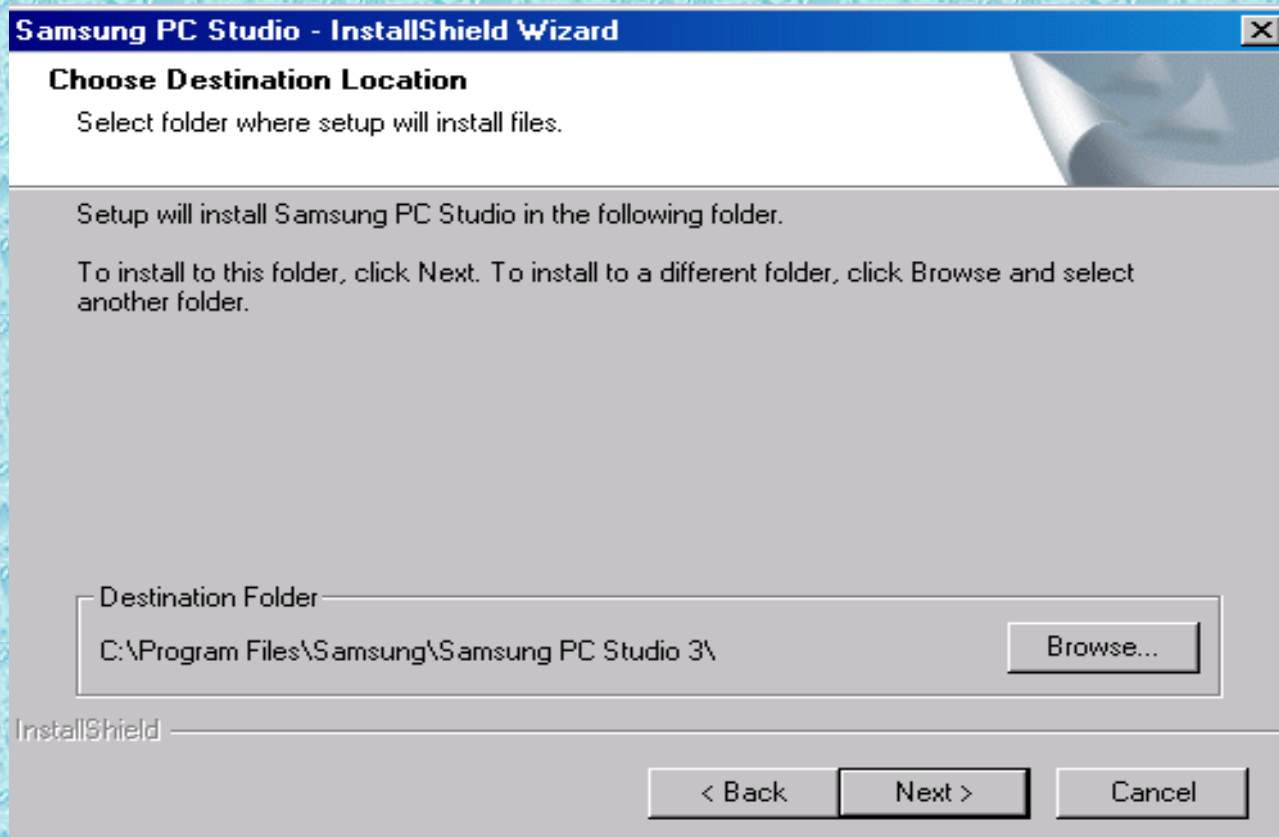


Click on Install

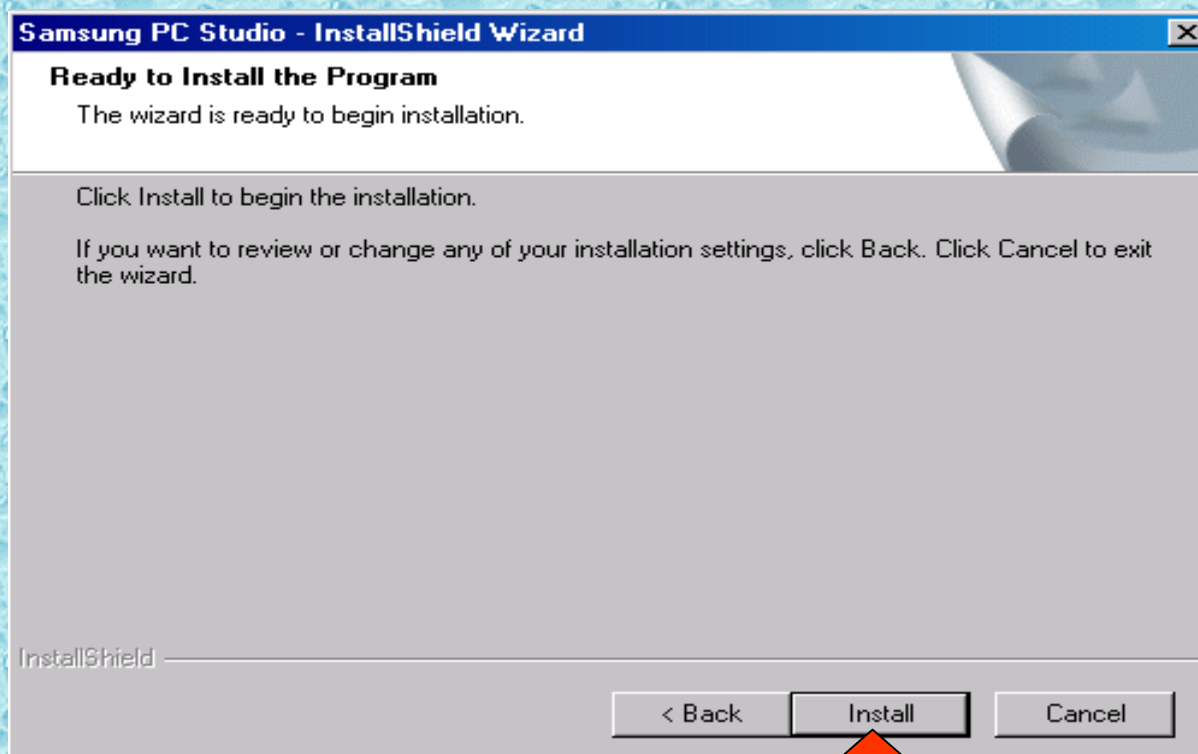


Please wait for some time

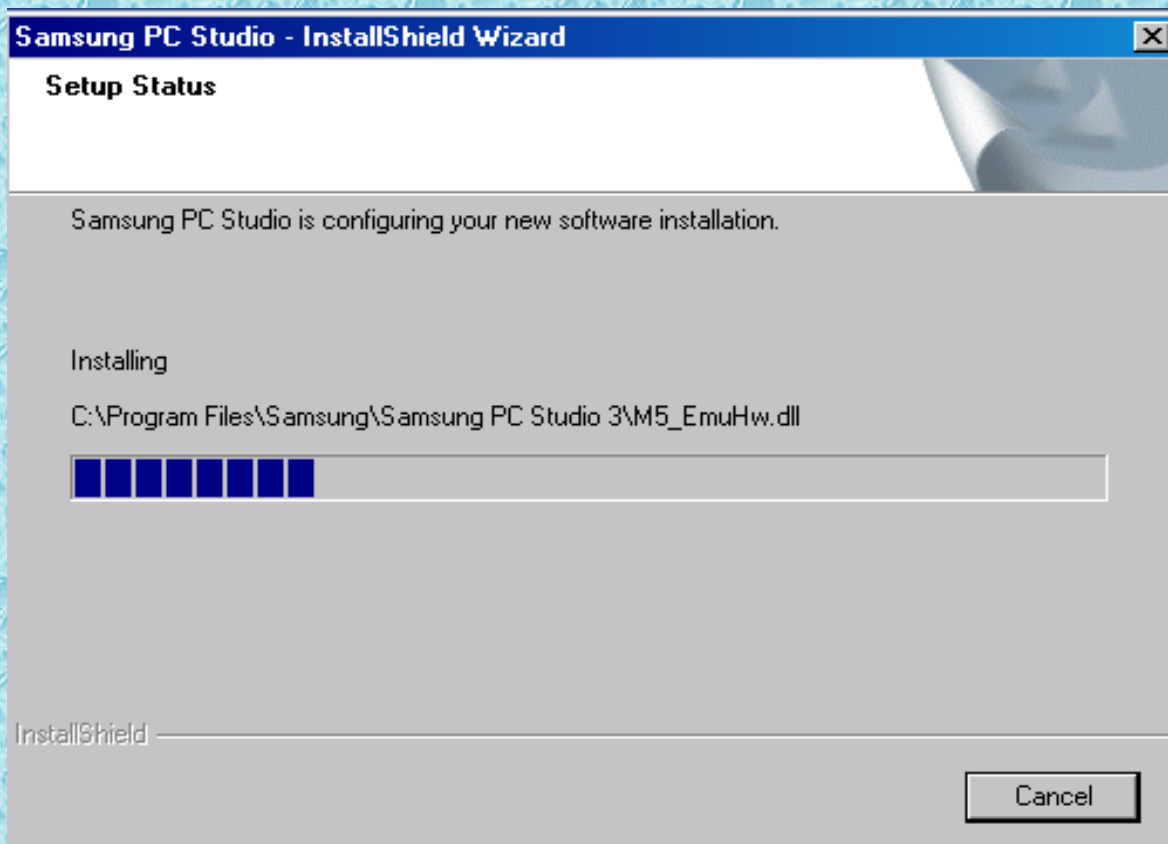

Installing the drivers for the phone. Just for reference only.

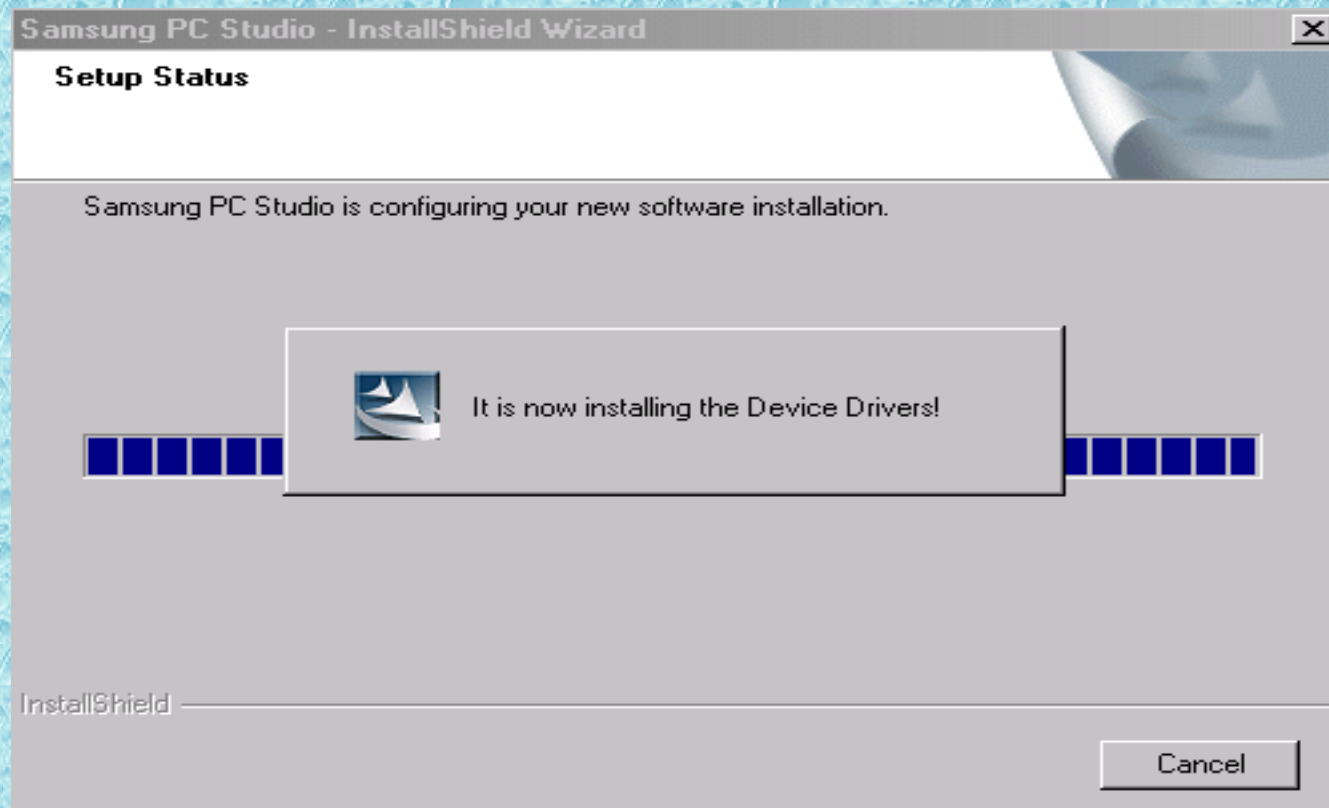

Click on Finish

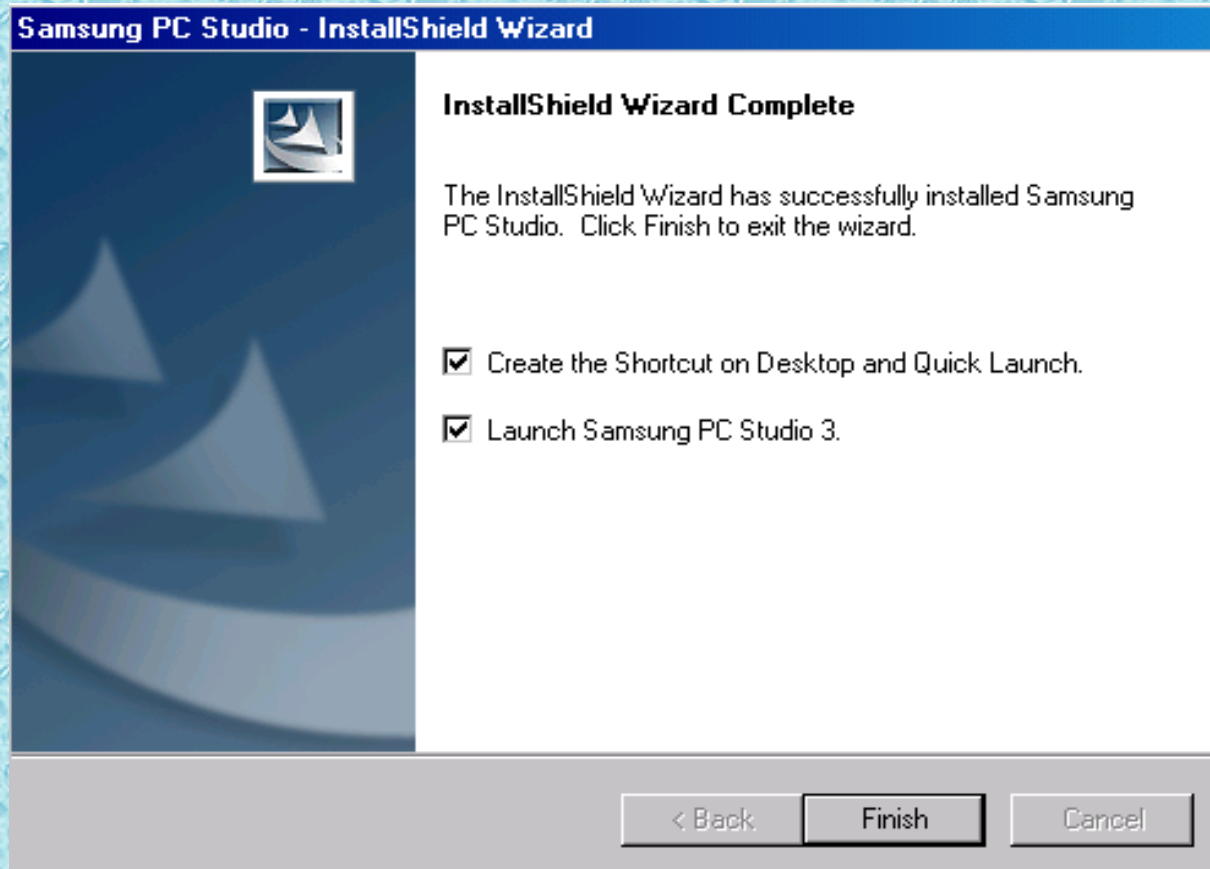


If you are connected to the internet then it will take live updates automatically. As this has to be done for the first time only, it is advisable to load PC Studio while you are connected to the internet to have an advanced version of PC Studio and it automatically resolves the problems while connecting via GPRS. Click on Start.



Please ignore slides from 11 to 16 if you are not connected to the internet


Downloading live updates.Reference only.

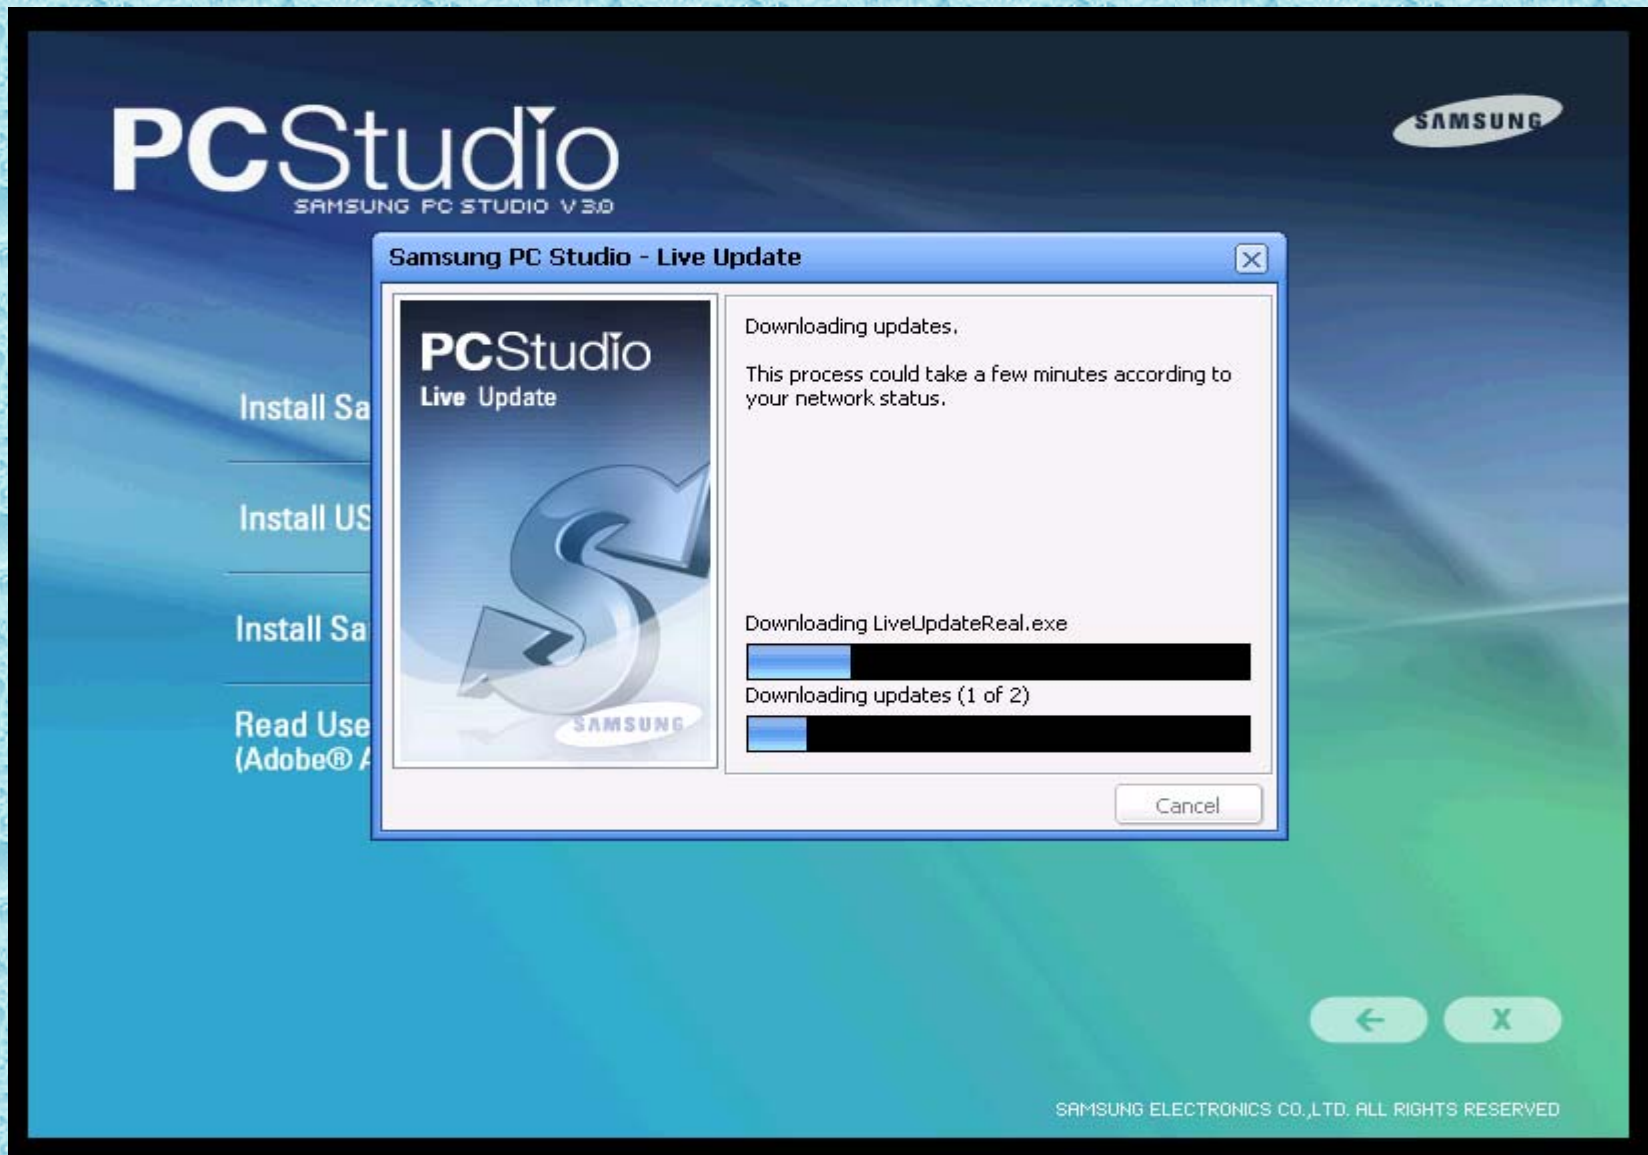


Click on Start



For reference only.

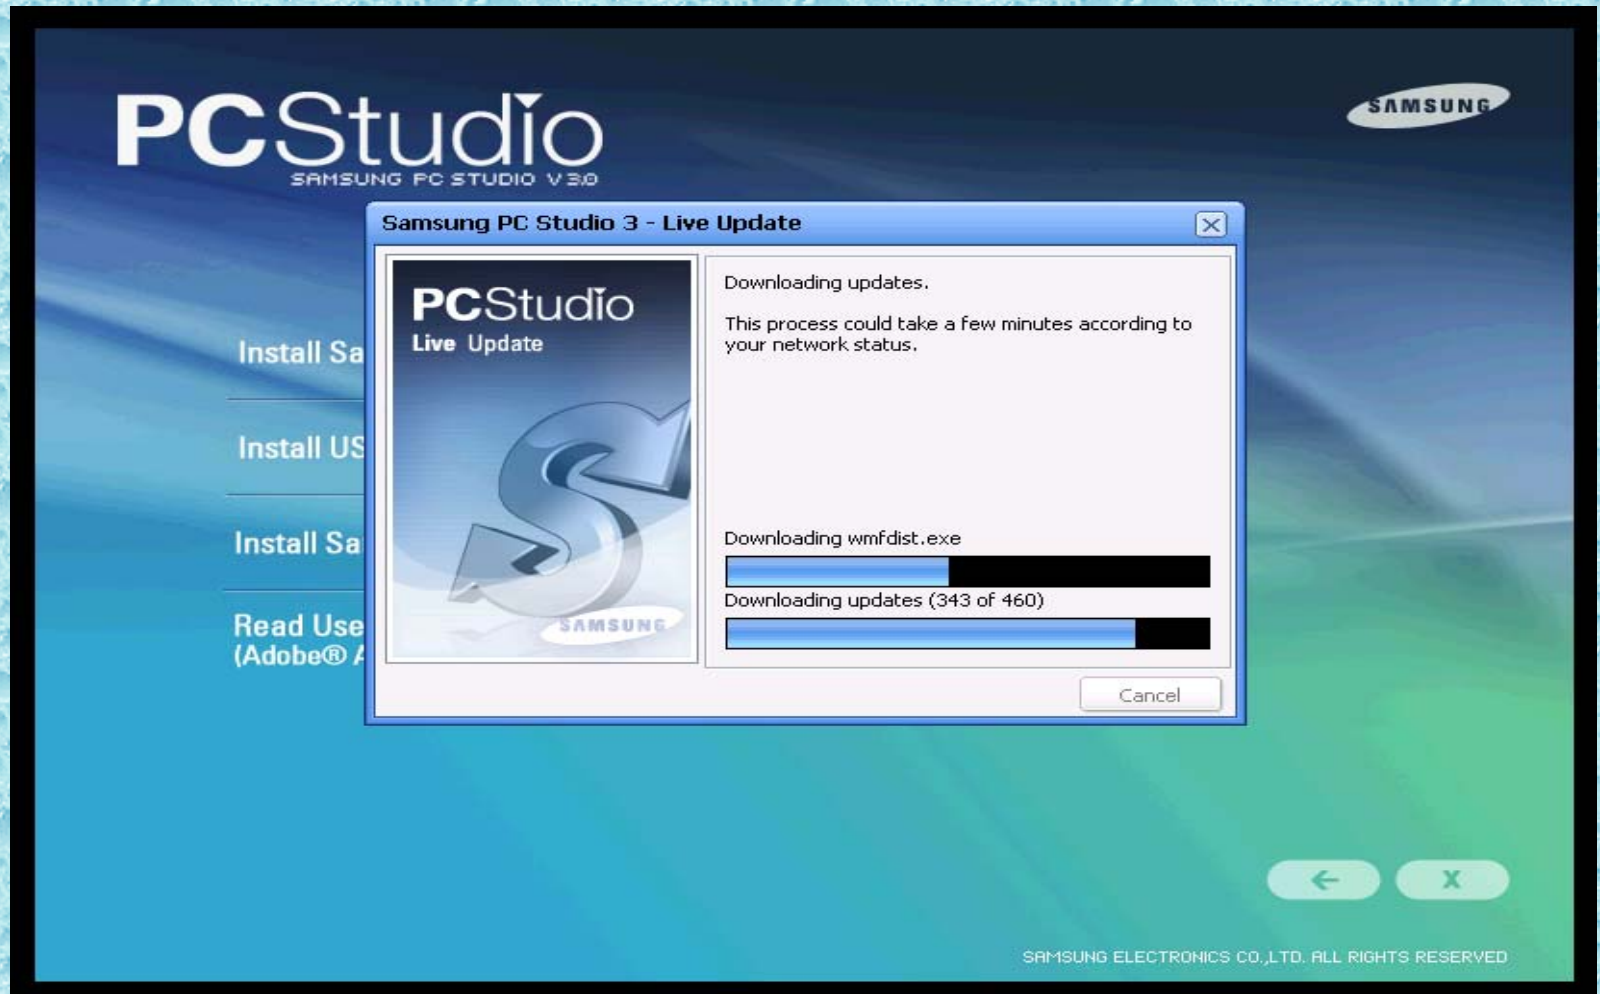


Applying updates

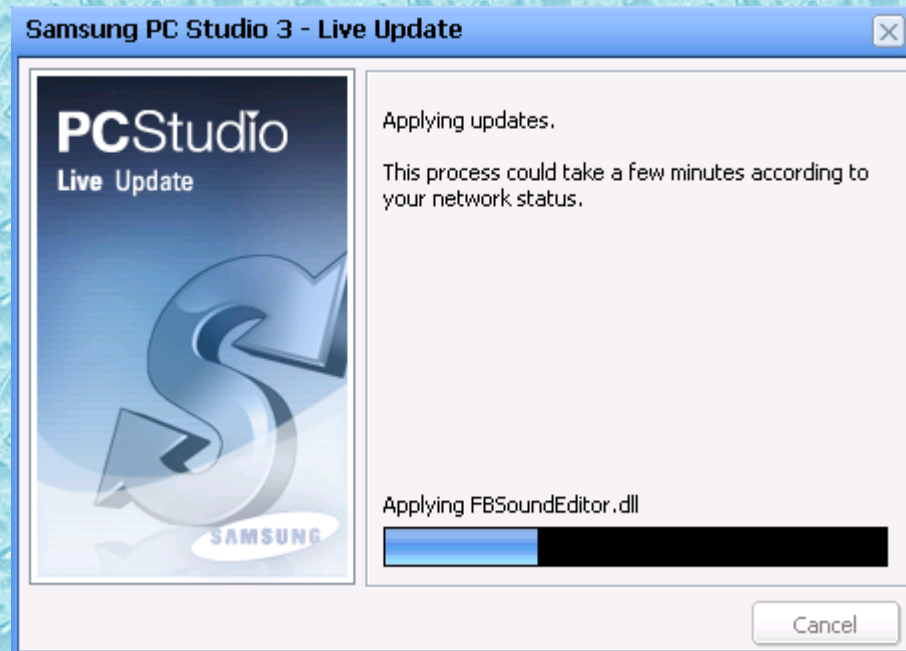


Click on Finish




Cable is shown selected. You can select any connection i.e. Cable, Bluetooth or Infrared but **It is advisable and insisted to use USB cable only** instead of Bluetooth or Infrared as it gives better speed and reliable connection. Click on Next>

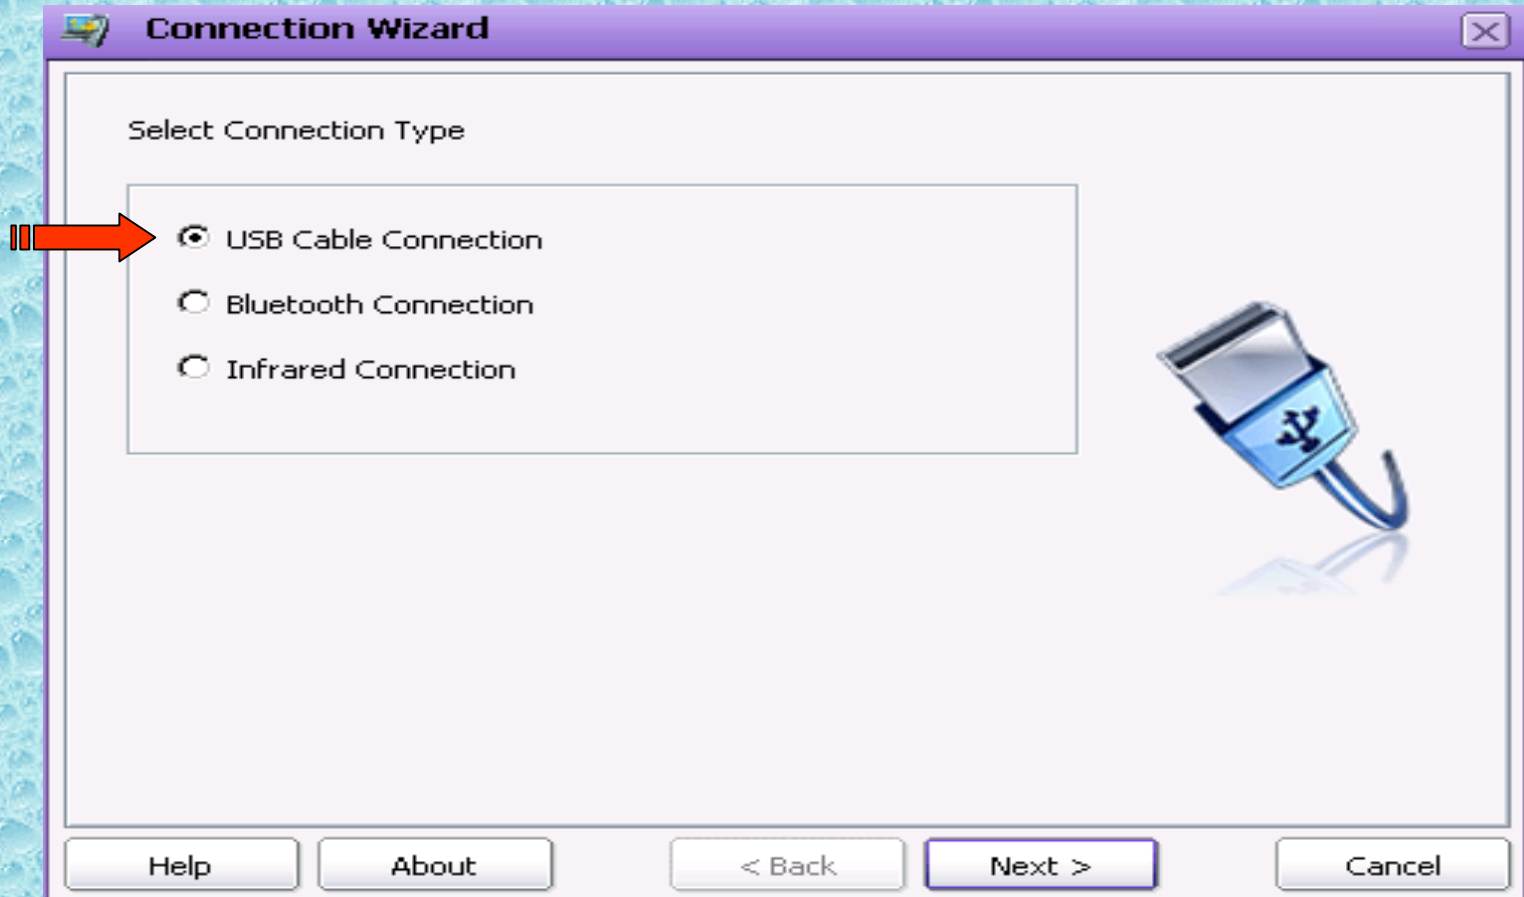

Please connect your cable to the computer and your mobile phone to the cable. For the first time only this hardware and drivers will be installed. Please do not disconnect the cable while installation.

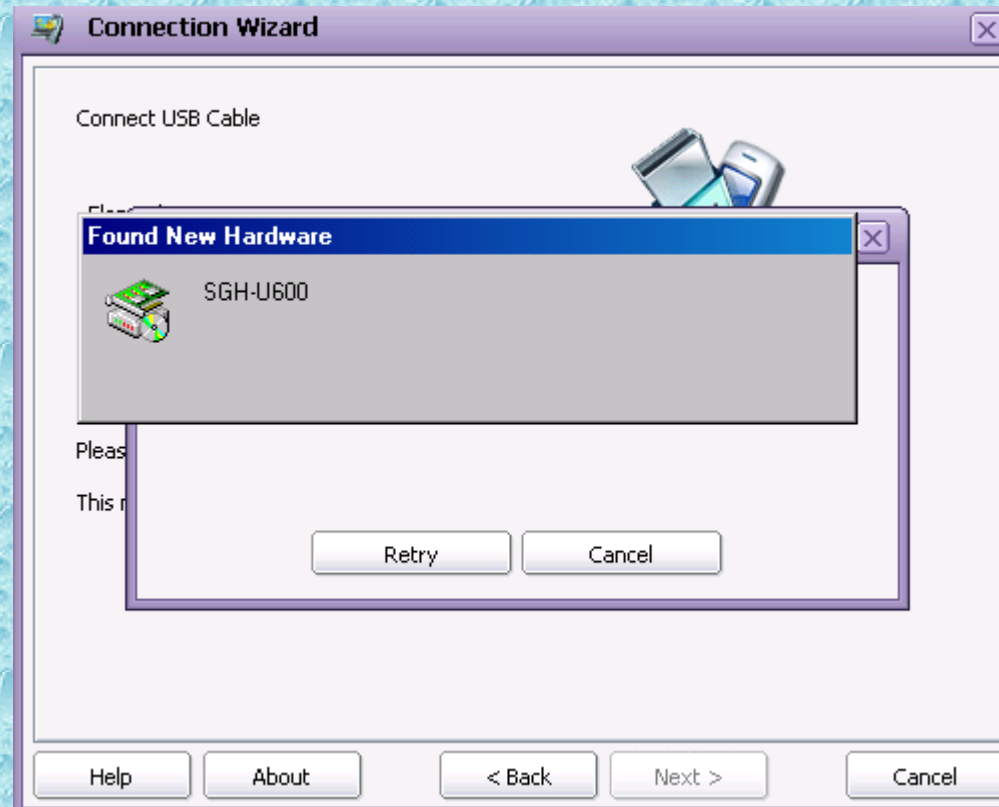

If the installation is completed then you must restart PC/Laptops before new settings will take effect. Please see the right bottom corner of your screen. Please disconnect the cable from computer as it is safe before restart the computer. Click on Yes.

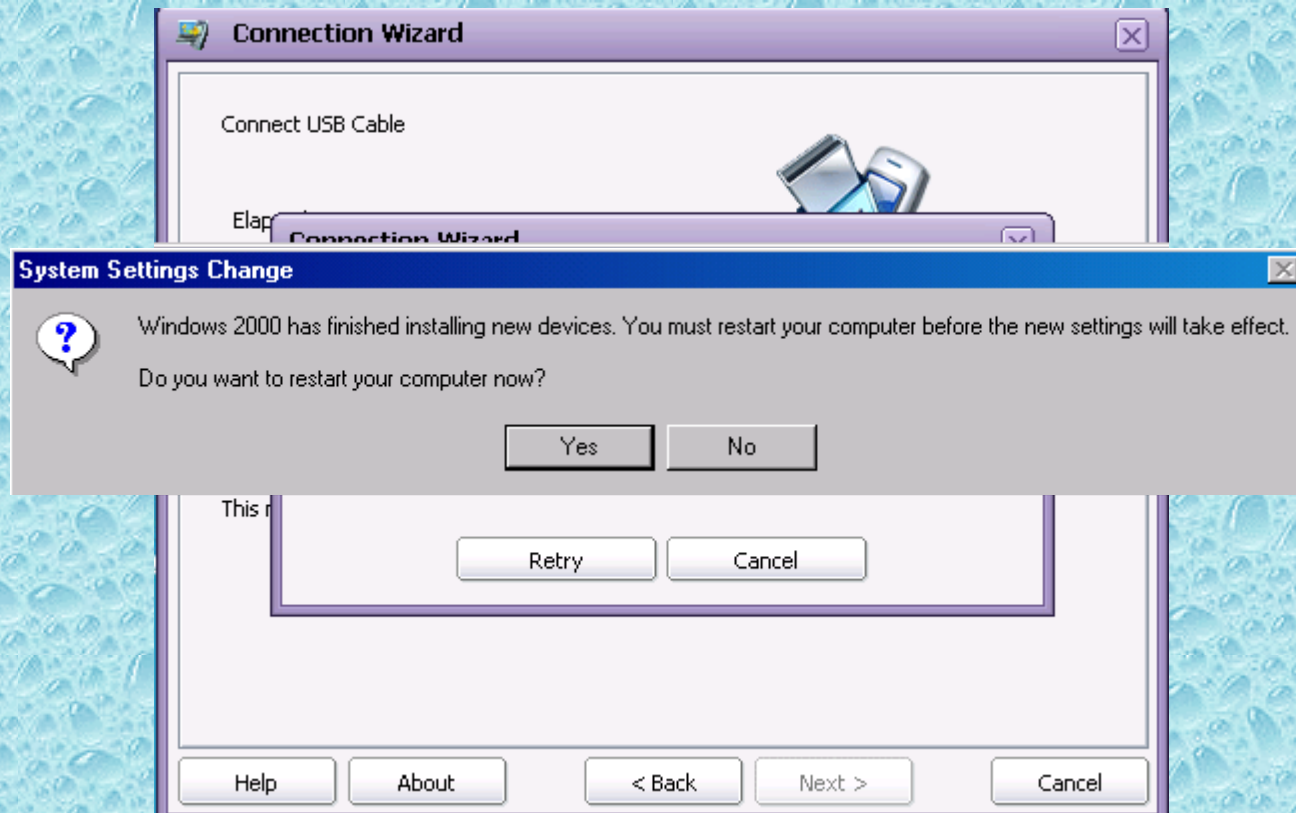


Reference only

Found New Hardware



SAMSUNG Mobile USB Modem

The Connection Wizard will open. Your phone model will be displayed as was recognized successfully. In this example showing Samsung SGH-U600. Click on Finish.

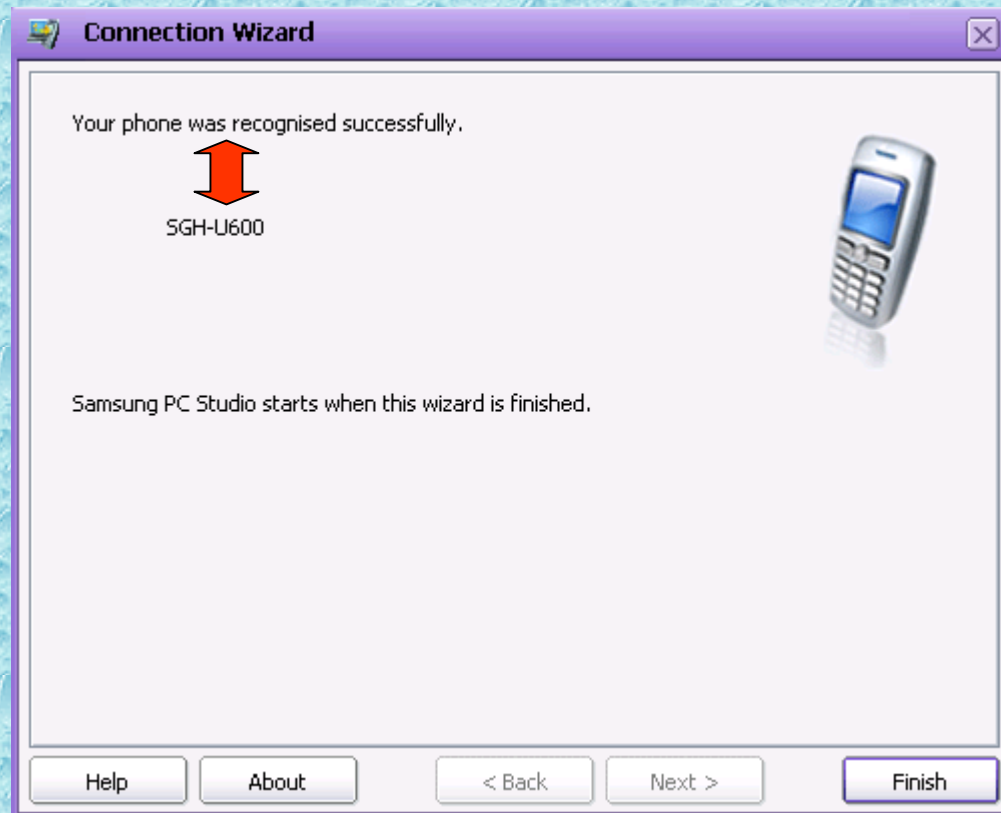

Select Manage Internet Connections




Networking Wizard will open. Click on Next




Select Create for creating new connection and click on Next



It's Connection Name. You can write any name as you like.
Here I had given B.S.N.L. GPRS. Click on Next

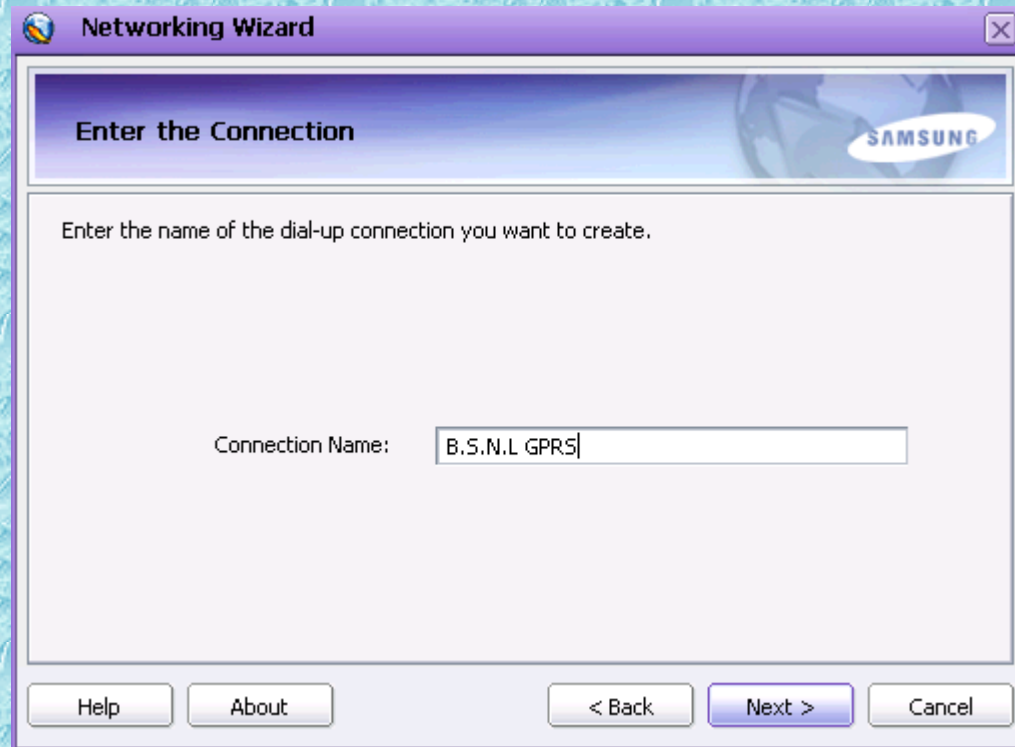

Select SAMSUNG Mobile USB Modem and click on Next

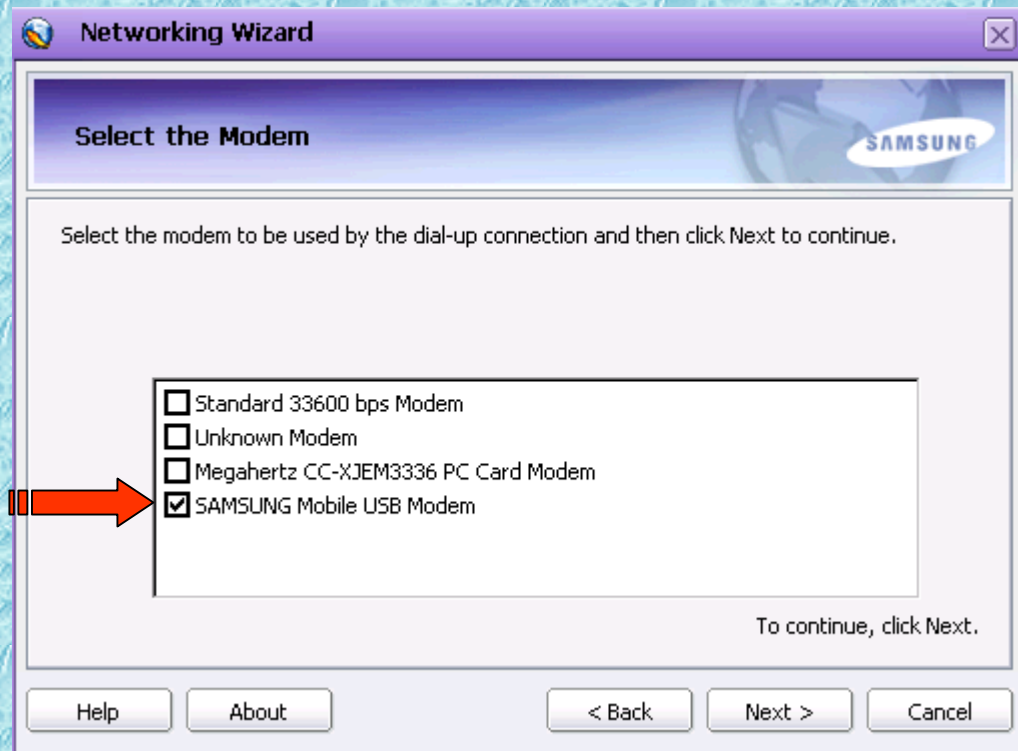

This is very important step. Select Country as [Other] and network provider as [Other] from the respective drop down list

Here you have to write in small

(Access point name) APN Name : **gprswest.cellone.in**

Phone Number : ***99***#**

User name and Password should be blank. Please do not enter any user name and password. It should be exactly same shown in this slide. Click on Next.

Country: [Other]

Network Provider: [Other]

APN Name: gprswest.cellone.in

Phone Number: *99***#

User ID:

Password:

Advanced...

Help About < Back Next > Cancel


Please check APN Name and Phone Number again.
Click on Next



Click on Finish



User name and Password should be blank and directly click on Dial

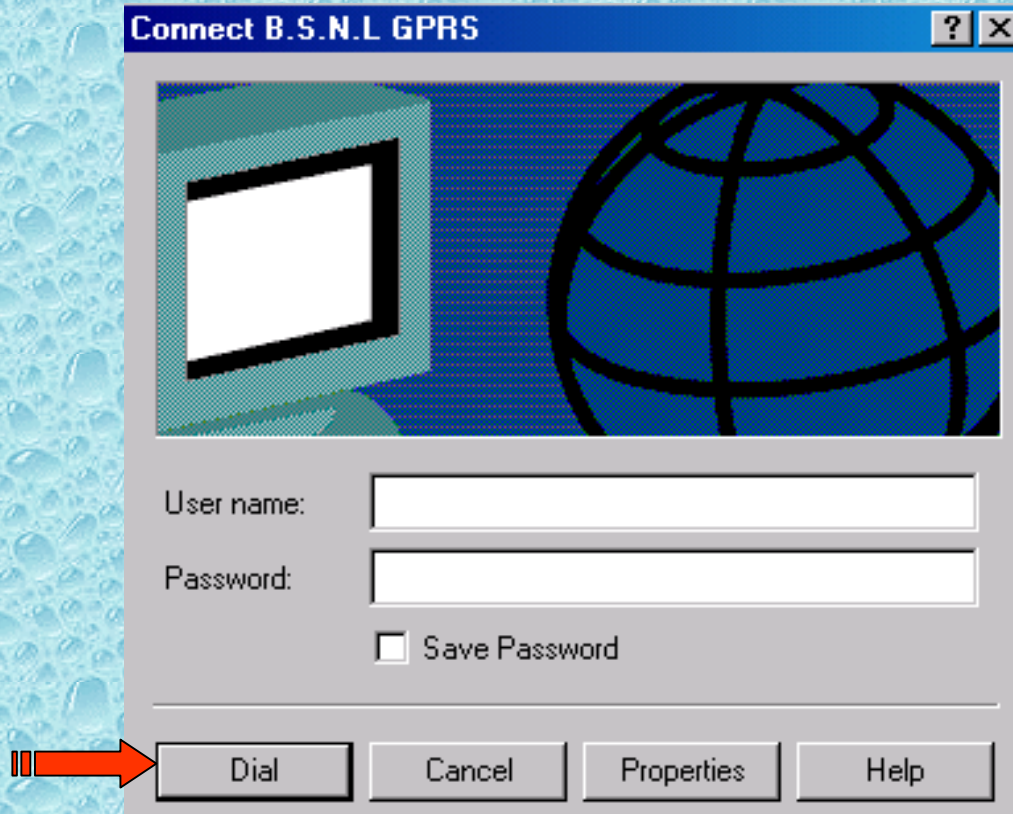

Please wait

Connecting B.S.N.L. GPRS...



Registering your computer on the network...


Cancel

ITS CONNECTED.....

Now you can browse any internet site as you like.



B.S.N.L. GPRS is now connected
Speed: 460.8 Kbps

Its wonderful world of internet via B.S.N.L. GPRS. For knowledge click on LAN icon (two computers ) in the right bottom corner. Received Bytes should be greater than sent and Errors should be 0. It is advisable to disable the other LAN connection if any you are using. For next time browsing click on the short cut icon of the new connection you made from desktop and browse the internet.



Bharat Sanchar Nigam Ltd. - India's No. 1 Telecommunications Company - Microsoft Internet Explorer

File Edit View Favorites Tools Help

Address <http://www.bsnl.co.in/>

BHARAT SANCHAR NIGAM LTD

HOME SITE MAP CONTACT US

CORPORATE SERVICES NETWORK LIVE NOTICE BSNL LINKS

TRAVEL LIGHT

Roam at Re. 1 only with BSNL's Plan 490

BSNL BEST HAT MERE LIYE

- BSNL launches 8 Mbps broadband service under business plan [Details>>](#)

News Flash RSS Feed [more news>>](#)

Search... **Value Added Services**



BSNL 1 Status

General Details

Connection

| | |
|-----------|------------|
| Status: | Connected |
| Duration: | 00:03:17 |
| Speed: | 460.8 Kbps |

Activity

| | |
|---|---|
| Sent | Received |
| Bytes:  65,733 |  104,248 |
| Compression: 0 % | 0 % |
| Errors: 0 | 0 |

Properties Disconnect Close

Online Services

service\dataone.htm

BSNL Units

Unknown Zone

THANK YOU

FOR USING B.S.N.L.CELLULAR SERVICES

Still if you have the problem please refer our slide show of **PROBLEMS AND THEIR SOLUTIONS**
or
contact our 24 hours 365 days
help line no.9400024365 from landline and 24365 from mobile.